


P-AFE07TN-C-EK

Series 700E refrigerated cabinet, operating temperature
-2/+8, EK door, with gas R290, C class

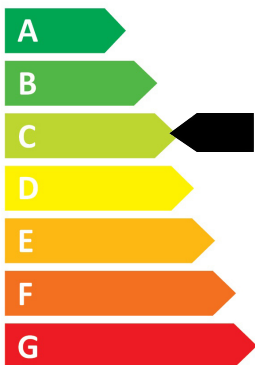

561,37 | kWh/annum

Technology, design and production 'Made in Italy'

Stainless-steel interior and exterior. Galvanised steel external
base, top and back

Rounded internal corners

High-pressure injected CFCs free polyurethane insulation

Door reversible with kit;

Front electronic control panel with 2 NTC thermistors

Automatic defrosting and condensate evaporation

Height-adjustable stainless-steel feet (110/180 H mm)

Predisposition for led lighting and lock (optional)

Easy installation, ready to use

Standard set-up:

Racks

3 pairs of runners


3 plasticized grids GN 2/1

Fan stop

P-AFE07TN-C-EK

Series 700E refrigerated cabinet, operating temperature
-2/+8, EK door, with gas R290, C class

Operating temperature °C	-2/8
Energy consumption/year (AEC-kWh)	561,37
Net volume	454,74
Climate class	4
Refrigerant gas	R290
GWP	3
LwA dB(A)	42
Refrigeration	MONOBLOCK-VENTILATED
Defrosting	AUTOMATIC WITH HOT GAS
Condensation evaporation	AUTOMATIC
Refrigeration power (W)	368
Voltages (V)	230 1N
Frequency (Hz)	50
Power supply (W)	280
Supply current (A)	1,5
Material	INOX 18/10
Insulation thickness (mm)	60
Feet height (mm)	FROM 110 TO 180
Grids	3 DI SERIE
Grid dimensions (mm)	530x650
Maximun load per grill (kg)	30
Dimensions with packaging (mm) LxWxH	760x840x2090
Dimensions without packaging (mm) LxWxH	710x809x2034/2104
Gross weight (kg)	125
Net weight (kg)	110

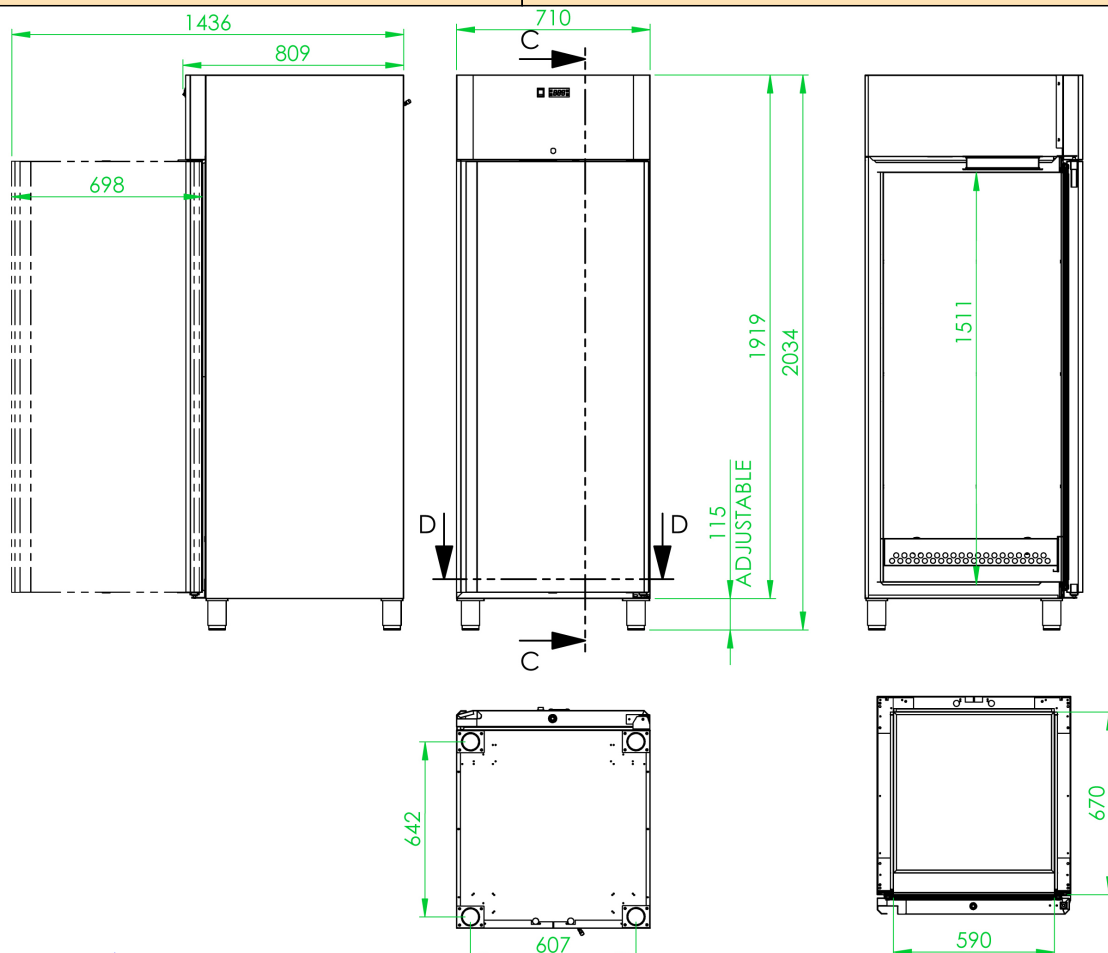

Immagini e dimensioni indicative / approximate pictures and size
I dai tecnici possono variare senza preavviso / Technical data may change without notice