

ICGT101E


GAS DIRECT STEAM COMBI OVEN
10 X 1/1 GN
10 X 600 X 400

ASSISTED COOKING
 MANUAL ELECTRONIC CONTROLS



ELECTRONICALLY CONTROLLED

Each setting is easy and fast, thanks to the new browser display. The three knobs make manual use of the oven easy and intuitive, creating a same results as a mechanical oven.

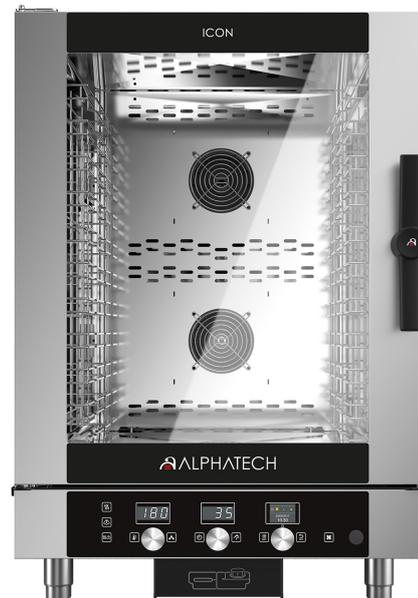

COOKING PROGRAMS



CORE PROBE (OPTIONAL)



2 SPEED FAN



CLIMA



ECOSPEED



ECOVAPOR



GFT



AUTOMATIC WASHING



ECO WASH

TECHNICAL DATA

Capacity	GN EN	10 x 1/1 GN 10 x (600 x 400) EN	Total electric power	kW	0,5
Distance between layers	mm	70	Gas versions nominal heating output	kW / kcal	16 / 13760
Meals - Croissants	n°	80 / 150 - 120 / 160	Chamber heating output	kW / kcal	16 / 13760
External dimensions	mm	777 x 729 x 1152 h	Fan power	kW	0,4
Packing dimensions	mm	910 x 865 x 1265 h	Power supply voltage	V	1N-AC 230
Weight - Net / Gross	kg	111 / 124	Frequency	Hz	50

Special voltages and frequencies on request.

ICGT101E

COOKING MODES

- AUTOMATIC WITH 95 TESTED AND STORED COOKING PROGRAMMES, INCLUDING PROGRAMMES FOR REHEATING ON THE PLATE OR IN THE PAN.
- PROGRAMMABLE WITH THE ABILITY TO STORE 99 COOKING PROGRAMMES IN AUTOMATIC SEQUENCE (UP TO 9 CYCLES), ASSIGNING A NAME AND DEDICATED ICON.
- MANUAL COOKING WITH THREE COOKING MODES AND INSTANT COOKING START: CONVECTION FROM 30°C TO 260°C, STEAM FROM 30°C TO 130°C, COMBINATION CONVECTION + STEAM FROM 30°C TO 260°C.
- CLIMA® - AUTOMATIC SYSTEM FOR MEASURING AND CONTROLLING THE HUMIDITY IN THE COOKING CHAMBER.
- RAPID SELECTION OF FAVOURITE PROGRAMS USING SCROLL & PUSH, WITH THE DEDICATED SCROLLER.

OPERATION

- LED HVS (HIGH VISIBILITY SYSTEM) ALPHANUMERIC DISPLAY TO DISPLAY THE TEMPERATURES, CLIMA, TIME AND CORE TEMPERATURE.
- 2.4-INCH (LCD - TFT) COLOUR DISPLAY FOR DISPLAYING YOUR FAVOURITE PROGRAMS, PRE-SET PROGRAMS, FAN, AUTOMATIC WASHING, MENUS AND SETTINGS.
- SCROLLER KNOB WITH SCROLL AND PUSH FUNCTION FOR CONFIRMING CHOICES.
- MANUAL PRE-HEATING.

CONTROL MECHANISMS

- AUTO REVERSE (AUTOMATIC REVERSE OF FAN ROTATION) FOR PERFECT COOKING UNIFORMITY.
- AUTOMATIC CHAMBER VENTING CONTROL.
- MANUAL HUMIDIFIER.
- EASY ACCESS TO PROGRAMMABLE USER PARAMETERS TO CUSTOMISE THE APPLIANCE THROUGH THE USER MENU.
- 2 FAN SPEEDS, THE REDUCED SPEED DECREASES HEATING POWER. FOR SPECIAL COOKING METHODS, YOU CAN USE AN INTERMITTENT SPEED.
- TEMPERATURE CONTROL AT THE PRODUCT CORE USING A PROBE WITH 4 DETECTION POINTS (CORE PROBE OPTIONAL).
- NEEDLE CORE PROBE Ø 1 MM, FOR VACUUM COOKING AND SMALL PIECES (OPTIONAL).
- USB CONNECTION TO DOWNLOAD HACCP DATA, UPDATE SOFTWARE AND LOAD/DOWNLOAD COOKING PROGRAMMES.
- SERVICE PROGRAM: TESTING THE OPERATION OF THE ELECTRONIC BOARD - DISPLAY OF THE TEMPERATURE PROBES - COUNTER FOR OPERATING HOURS OF ALL PRIMARY FUNCTIONS FOR PROGRAMMED MAINTENANCE.
- SELF-DIAGNOSIS BEFORE STARTING TO USE THE EQUIPMENT, WITH DESCRIPTIVE AND AUDIBLE SIGNALLING OF ANY ANOMALIES.
- LOW CONSUMPTION LED COOKING CHAMBER LIGHTING. OPTIMAL VISIBILITY IN ALL POINTS OF THE COOKING CHAMBER. NEUTRAL LIGHT THAT DOESN'T ALTER THE ORIGINAL COLOURS OF THE PRODUCT.
- ECOSPEED - BASED ON THE QUANTITY AND TYPE OF PRODUCT, THE OVEN OPTIMISES AND CONTROLS THE ENERGY OUTPUT, MAINTAINING THE BEST COOKING TEMPERATURE AND AVOIDING FLUCTUATIONS.
- ECOVAPOR - WITH THE ECOVAPOR SYSTEM, THERE IS A NET REDUCTION IN WATER AND ENERGY CONSUMPTION DUE TO THE AUTOMATIC CONTROLS OF THE STEAM SATURATION IN THE COOKING CHAMBER.
- GREEN FINE TUNING - A NEW BURNER MODULATION SYSTEM AND HIGH EFFICIENCY EXCHANGER TO PREVENT POWER WASTAGE AND REDUCE HARMFUL EMISSIONS.

CONSTRUCTION

- PERFECTLY SMOOTH WATERTIGHT COOKING CHAMBER WITH ROUNDED EDGES.
- DOOR WITH REAR VENTILATED DOUBLE TEMPERED GLASS WITH AIR CHAMBER AND INTERIOR HEAT-REFLECTING GLASS FOR LESS HEAT RADIATION TOWARDS THE OPERATOR AND GREATER EFFICIENCY.
- INTERNAL GLASS THAT FOLDS TO OPEN FOR EASY CLEANING.
- HANDLE WITH LEFT OR RIGHT HAND OPENING.
- ADJUSTABLE HINGE FOR OPTIMAL SEAL.
- DEFLECTOR THAT CAN BE OPENED FOR EASY FAN COMPARTMENT CLEANING.
- IPX3 PROTECTION AGAINST WATER SPLASHES.

GAS HEATING SYSTEM

- BLOWN AIR TYPE OF MODULATING BURNERS FOR THE CAVITY.
- AUTOMATIC FLAME IGNITION.
- ELECTRONIC CONTROL OF THE FLAME WITH AUTOMATIC IGNITION RESET.
- HIGH EFFICIENCY HEAT EXCHANGER WITH STEEL EXPANSION CABINET.

SAFETY FEATURES

- COOKING CHAMBER TEMPERATURE LIMITER.
- FAN MOTOR THERMIC PROTECTION.
- ELECTRONIC CONTROL FOR LACK OF WATER ALARM.
- SELF-DIAGNOSIS WITH SMART ERROR VIEWING.
- VENTILATED COMPONENT COOLING SYSTEM WITH ELECTRONICALLY CONTROLLED OVER-TEMPERATURE DISPLAY.
- MECHANICAL DOOR SWITCH.
- ELECTRONIC FLAME DETECTION SENSOR THAT INTERRUPTS THE GAS FLOW IF THE BURNER FLAME IS ACCIDENTALLY SWITCHED OFF.
- GAS SHORTAGE-SAFETY PRESSURE SWITCH.
- ELECTRONICALLY CONTROLLED TWO-STAGE GAS VALVES.

CLEANING AND MAINTENANCE

- AUTOMATIC CLEANING SYSTEM LCS (LIQUID CLEAN SYSTEM) (OPTIONAL), WITH BUILT-IN TANK AND AUTOMATIC DISPENSING (COMBICLEAN BOOSTED LIQUID CLEANSER IN 100% RECYCLABLE CARTRIDGES. SUPPLIED WITH 1 LIQUID CLEANSER CARTRIDGE CDL05B - 990 GR.).
- 7 AUTOMATIC CLEANING PROGRAMMES.
- MANUAL CLEANING SYSTEM WITH EXTERNAL HAND SHOWER (SHOWER OPTIONAL).

STANDARD EQUIPMENT

- SIDE RUNNERS

OPTIONAL - TO BE REQUESTED WHEN ORDERING OVEN

- **ILCS2:** AUTOMATIC CLEANING SYSTEM LCS. SUPPLIED WITH 1 LIQUID CLEANSER CARTRIDGE CDL05B, 990 GR.
- **ISC04:** MULTIPOINT CORE PROBE. Ø 3 MM
- **ISA01:** NEEDLE CORE PROBE. Ø 1 MM
- **IPS101:** OPPOSITE HINGED DOOR

ICGT101E

- **APDS:** DOUBLE RELEASE DOOR OPENING
- **ISP864:** EXTRA CHARGE FOR SHELF RACKS - EN (600 X 400) VERSION - IGP864
- **CAV101:** FLUE WITH WIND PROTECTION DEVICE FOR GAS MODELS - DIRECT STEAM MODELS
- **CSA:** RETRACTABLE BUILT-IN 5 LITERS TANK. CAN BE USED IN THE LACK OF WATER CONNECTION FOR STEAM OR COMBI COOKINGS WITH A RANGE OF UP TO 60 MINUTES. NOT AVAILABLE WITH AUTOMATIC CLEANING SYSTEM
- **OCBM4:** ISOLATION TRANSFORMER FOR TWO-PHASE/SINGLE PHASE CONNECTION FOR GAS MODELS 2AC 220-240V/1N AC 230V

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

- **KILCS2:** KIT FOR AUTOMATIC CLEANING SYSTEM LCS. SUPPLIED WITH 1 LIQUID CLEANSER CARTRIDGE CDL05B, 990 GR.
- **KISC04:** KIT FOR MULTIPOINT CORE PROBE. Ø 3 MM
- **KISA01:** KIT FOR NEEDLE CORE PROBE. Ø 1 MM
- **KIPS101E:** KIT FOR OPPOSITE HINGED DOOR
- **ICLD:** HAND SHOWER WITH FITTINGS AND CONNECTIONS
- **IBAS051:** ANTI-INTRUSION BAR
- **ISR101E:** STAINLESS STEEL FLOOR STAND.
- **NPT071:** SIDE RUNNERS - FIXED TO FLOOR STAND. STAINLESS STEEL
- **NPT064:** SIDE RUNNERS - FIXED TO FLOOR STAND. STAINLESS STEEL
- **IGP864:** PAIR OF SHELF RACKS - 600 X 400
- **NPF04:** FLANGED FEET KIT FOR FLOOR STANDS, FOR MARINE INSTALLATIONS
- **RP04:** CASTOR KIT FOR FLOOR STANDS, 2 WITH BRAKE
- **ICFX02:** FAT FILTER - 2 PCS.
- **KFP002:** FOOT FASTENER KIT

CERTIFICATIONS



