

# MENUMASTER<sup>®</sup> Commercial

Project #: \_\_\_\_\_

Item #: \_\_\_\_\_



Model RCS511DSE shown

## Medium Volume

### Menumaster Commercial Microwave Model RCS511DSE

#### Power Output

- 1100 watts of power.
- Four power levels.

#### Easy to Use

- User friendly ten minute dial timer.
- Timer automatically resets to zero if door is opened during heating. User option allows manual reset to zero.
- See-through door and lighted interior for monitoring without opening the door.
- 34 Liters (1.2 cubic ft.) capacity accommodates a 356 mm (14") platter, prepackaged foods and single servings.
- Stackable to save valuable counter space.

#### Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and a commercial look.
- Constructed to withstand the foodservice environment.
- Non-removable air filter protects oven components.

### Medium Volume

This category of microwave is ideal for...

#### Applications:

- Coffee shops
- Ethnic restaurants
- Concessions
- Dessert stations


All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.



AIA File #:

Specification #:

# MenuMaster Commercial Microwave Model RCS511DSE | Medium Volume

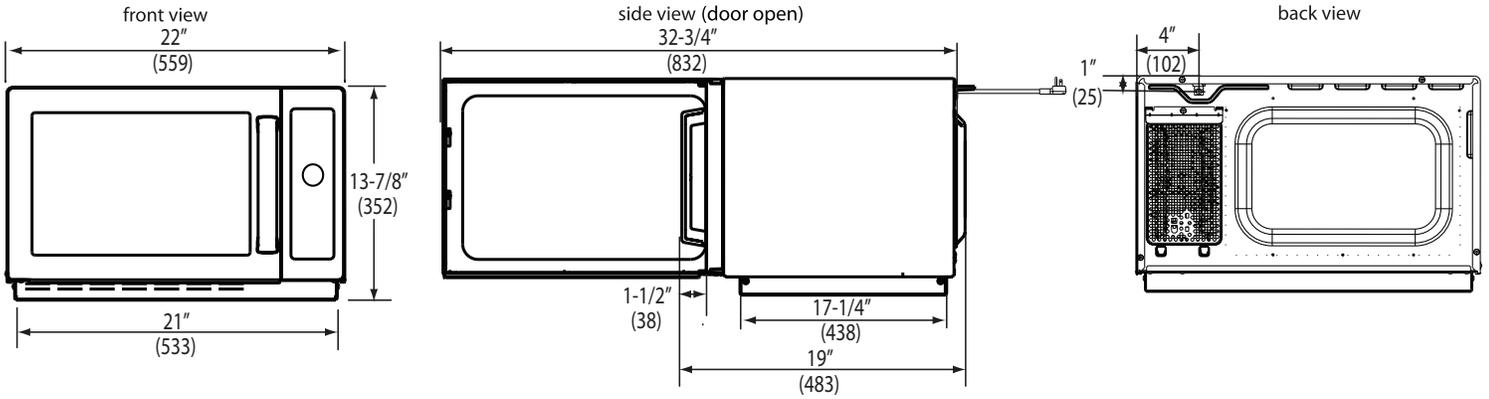

**Installation Clearances** - Top: 7" (178), Sides: 1" (25), Back: None

Specification #:

Specifications			
Model	RCS511DSE	UPC Code 728028129489	
Configuration	Countertop		
Control System	Dial		
Max. Cooking Time	10:00		
Power Levels	4		
Time Entry Option	Yes		
Microwave Distribution	Rotating antenna, top		
Magnetron	1		
Stackable	Yes		
Stage Cooking	1		
Interior Light	Yes		
Door Handle	Grab & Go		
Signal	End of cycle		
Exterior Dimensions	H 352 (13 7/8")	W 559 (22")	D*483 (19")
Cavity Dimensions	H 216 (8 1/2")	W 368 (14 1/2")	D 381 (15")
Door Depth	832 (32 3/4"), 90°+ door open		
Usable Cavity Space	34 Liters (1.2 cubic ft.)		
Exterior Finish	Stainless steel		
Interior Finish	Stainless steel		
Power Consumption	1600 W		
Power Output**	1100 W** Microwave		
Power Source	230V, 50 Hz, 16 A single phase		
Plug Configuration / Cord	CEE 7/7 "Schuko"	1.5 m (5 ft.)	
Frequency	2450 MHz		
Product Weight	19 kg (42 lbs.)		
Ship weight (approx.)	21 kg (47 lbs.)		
Shipping Carton Size	H 422 (16 5/8")	W 640 (23 3/8")	D 502 (19 3/4")
UPS Shippable	Yes		

### Specifications

Commercial microwave shall have a user-friendly 10 minute dial timer and an end of cycle audible signal. Timer shall automatically reset if the door is opened during heating with user option to manually reset to zero. There shall be a four power level and one cooking stage. Microwave output shall be 1100 watts distributed by one magnetron with a rotating top antenna to provide superior even heating throughout the cavity. Durable door shall have a tempered glass window and a grab and go handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The large 34 Liter (1.2 cubic ft.) cavity shall accommodate a 356 mm (14") platter. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel exterior and interior and be stackable to save counter and shelf space. The air filter shall be permanently affixed to the front of the oven. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services.



### Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at:

[www.acpsolutions.com/warranty](http://www.acpsolutions.com/warranty)



AIA File #:

Measurements are in millimeters

\* Includes handle

\*\* IEC 60705 Tested

Part No. 20154737  
Updated 6/21/2016  
Original Instructions



© 2016 ACP, Inc.  
Cedar Rapids, Iowa 52404