

EQUILYBRA

EB25

GLASSWASHER

DESCRIPTION

Glasswashers with electromechanical control panel.
Electrical supply 220 - 240V 1 ~ 50Hz. Two wash cycle.
Built-in peristaltic detergent and rinse aid dosing pumps.
Double-walled execution. Rack: 350x350 mm.

STANDARD FEATURES

DURABILITY

- AISI 304 stainless steel washing chamber;
- Double-walled AISI 304 stainless steel door;
- Rear Panneling;
- Ergonomic polypropylene handle.

SAFETY

- Automatic stop in case of accidental door opening;
- Thermostop as a standard: it ensures that the correct operating temperatures are reached.

EVERYTHING UNDER CONTROL

- **Electromechanical control panel:** intuitive and universal, allowing operators to choose between two wash cycles—short or intensive—based on the level of dirt;
- **Digital thermometer display:** shows real-time wash and rinse temperatures, ensuring full compliance with HACCP protocols;
- **Cycle countdown** and alarm codes enable quick diagnostics and troubleshooting, minimizing downtime and keeping operations running smoothly.

HYGIENE

- **WRIS®2+:** wash and rinse integrated system;
- **Single piece deep drawn tank** with rounded corners;
- **Built-in peristaltic detergent and rinse aid dosing pumps;**
- **Electronic temperature control** for consistent monitoring;
- **Double filtration system:** includes a polypropylene tank filter and a pump suction filter;
- Flat rack guides for easy cleaning operations. Strong and resistant, they are designed for intensive operations.

HYDRAMASTER SYSTEM


- This intelligent component seamlessly coordinates key hydraulic elements—such as pumps, wash arms, and sensors—to ensure an optimal and consistent water flow for exceptional results.

EB25

RACK EQUIPMENT

RACKS AND INSERTS - KIT STANDARD


- 1 Combination rack 350 x 350 mm, h. 150
- G2 - Cutlery holder, two places
- Insert for cup dishes

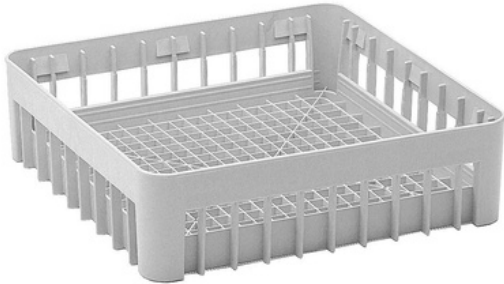

COMBINATION RACK



G2

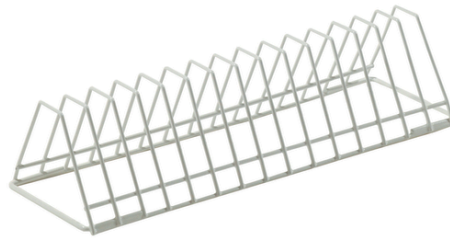

INSERT FOR CUP DISHES

RACKS AND INSERTS - KIT OPTIONAL


- 1 round rack
- G2 - Cutlery holder, two places
- Insert for cup dishes



ROUND RACK



G2

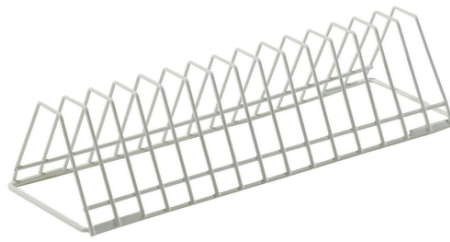
















INSERT FOR CUP DISHES

OPTIONAL

- Drain pump kit (provided separately)
- Built-in drain pump
- Special voltages
- Integrated water softener = EB25 A model
- External water softener

EB25

TECHNICAL DATA

	EXTERNAL SIZE	425 x 515 x 600 (AxBxC) mm
	OVERALL SIZE	800 (D) mm
	CLEARANCE *	250 (E) mm
	RACK SIZE	350 x 350 mm
	ELECTRICAL SUPPLY	220-240V 1~ 50Hz
	WASH PROGRAM LENGHT	90 / 120"
	MAX OUTPUT - WARM WATER CONNECTION (55 C°) ●	40 racks/h
	RINSE WATER CONSUMPTION	2,6 l /rack
	TANK HEATER ELEMENT	2 kW
	BOOSTER HEATER ELEMENT	2,5 kW
	TANK SIZE	9,5 l
	WASH PUMP	0,26 kW
	INSTALLED LOAD	2,76 kW
	NOISE	61 dB(A)
	WEIGHT	33 kg

The previous non-binding guidelines outline the ideal operating conditions for the machines. Actual values may vary depending on installation conditions and the items being washed. The operator is responsible for selecting the appropriate cycle and speed based on the level of soiling, taking into account both the current and expected washing and rinsing performance. Local conditions, such as the temperature of incoming water and the power supply, may require adjustments to these values. The actual volume of rinse water may also vary depending on site-specific conditions.
Comenda Ali Group srl reserves the right to modify product specifications at any time without prior notice.

EB25

TECHNICAL DRAWINGS

